
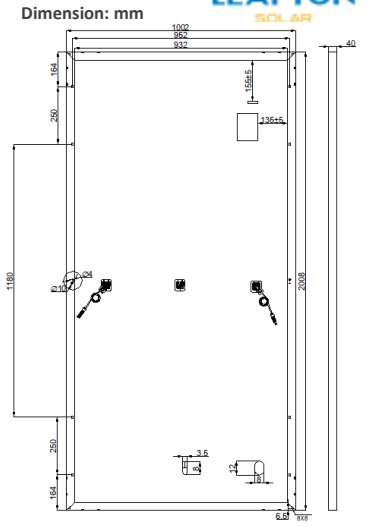


Mono Poly

LP156*156-P-72-H

Rated Power 350-370W

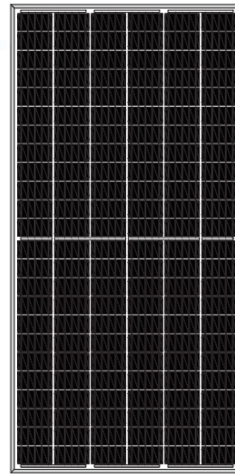

Product Series	LP156*156-P-72-H		
Power	350W	360W	370W
Open Circuit Voltage	47.10V	47.50V	47.90V
Short Circuit Current	9.58A	9.76A	9.93A
Maximum Power Voltage	39.10V	39.70V	40.20V
Maximum Power Current	8.95A	9.07A	9.21A
Module Efficiency	17.4%	17.9%	18.4%

Product Characteristics			
Weight	22.5kg	Junction Box	IP68
Module Size	2008*1002*40mm	Frame	Aluminum Alloy
Cell Amount	72*2 pcs	Cable	4mm ² , Landscape: N 1300mm/P 1300mm, Portrait: N 150mm/P 300mm
Cell Size	156.75*78.38mm	Connection	SIKE6/GZX1500
Maximum System Voltage	1500V	Application Level	Class A

Packing Configuration			
Modules/Pallet	26 pieces	Modules/40' container	572 pieces
Packing Description	22 Pallets, Total=26 X22=572		

Temperature Characteristics		Maximum Rating	
NOCT	45±2°C	Output Tolerance	±3%W
Temp Coefficient of ISC	+0.055%/°C	Operating Temperature	-40°C ~+85°C
Temp Coefficient of VOC	-0.32%/°C	Wind Load/Snow Load	2400pa/5400pa
Temp Coefficient of Pmax	-0.41%/°C	Fuse Current	15A

15 Years
Quality Warranties

25 Years
Power Guarantee

•10-YEAR 90% Maximum Output
•25-YEAR 80% Maximum Output


• J-PEC Product

• TUV Certificate

350W
?
370W

• Output 350W-370W

Current - Voltage Curve at Various Light Levels

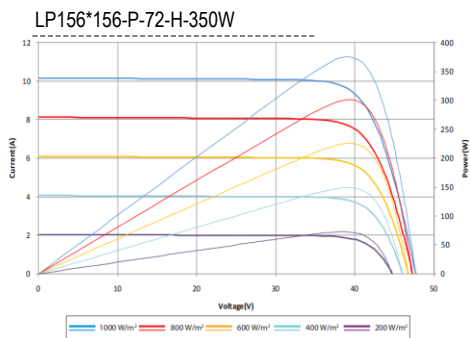

Output at Various Temperatures

