
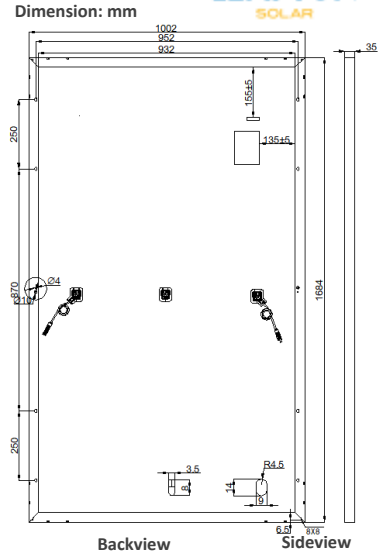


Mono

Poly

LP156*156-P-60-H

Rated Power 285-305W

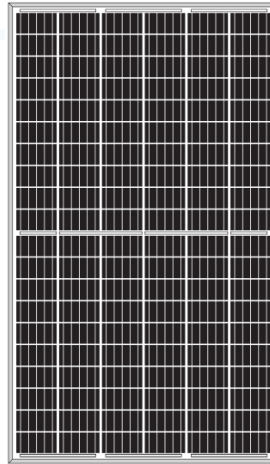

Product Series	LP156*156-P-60-H			
Power	285W	290W	300W	305W
Open Circuit Voltage	38.80V	39.00V	39.40V	39.60V
Short Circuit Current	9.55A	9.65A	9.85A	9.95A
Maximum Power Voltage	32.35V	32.80V	33.66V	34.00V
Maximum Power Current	8.81A	8.84A	8.91A	8.97A
Module Efficiency	16.70%	17.20%	17.80%	18.10%

Product Characteristics			
Weight	19kg	Junction Box	IP68
Module Size	1684*1002*35mm	Frame	Aluminum Alloy
Cell Amount	60*2 pcs	Cable	4mm ² , Landscape: N 1100mm/P 1100mm, Portrait: N 150mm/P 300mm
Cell Size	156.75*78.38mm	Connection	SIKE6/GZX1500
Maximum System Voltage	1500V	Application Level	Class A


Packing Configuration			
Modules/Pallet	30 pieces	Modules/40' container	780 pieces
Packing Description	26 Pallets, Total=30 X26=780		

Temperature Characteristics		Maximum Rating	
NOCT	45±2°C	Output Tolerance	±3%W
Temp Coefficient of ISC	+0.055%/°C	Operating Temperature	-40°C ~ +85°C
Temp Coefficient of VOC	-0.32%/°C	Wind Load/Snow Load	2400pa/5400pa
Temp Coefficient of Pmax	-0.41%/°C	Fuse Current	15A




•10-YEAR 90% Maximum Output

•25-YEAR 80% Maximum Output



Current-Voltage Curve at Various Light Levels

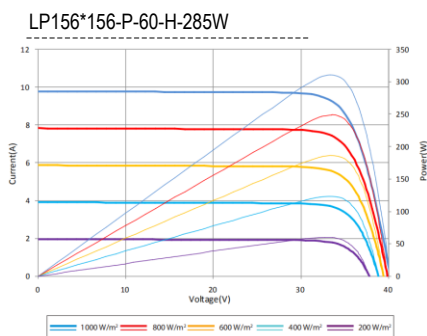

Output at Various Temperatures

